



# 396-3088Y1

## John Deere 1760

### Tank Mounting Kit Instructions

“Equipment” Manufacturer:




**JOHN DEERE**

**Kit Number:**

**530-01-550250 - 12 Row 1760 Wing Mounted Tank Kit - 150 Gallons**

**530-01-550500 - 12 Row 1760 Wing Mounted Tank Kit - 200 Gallons**

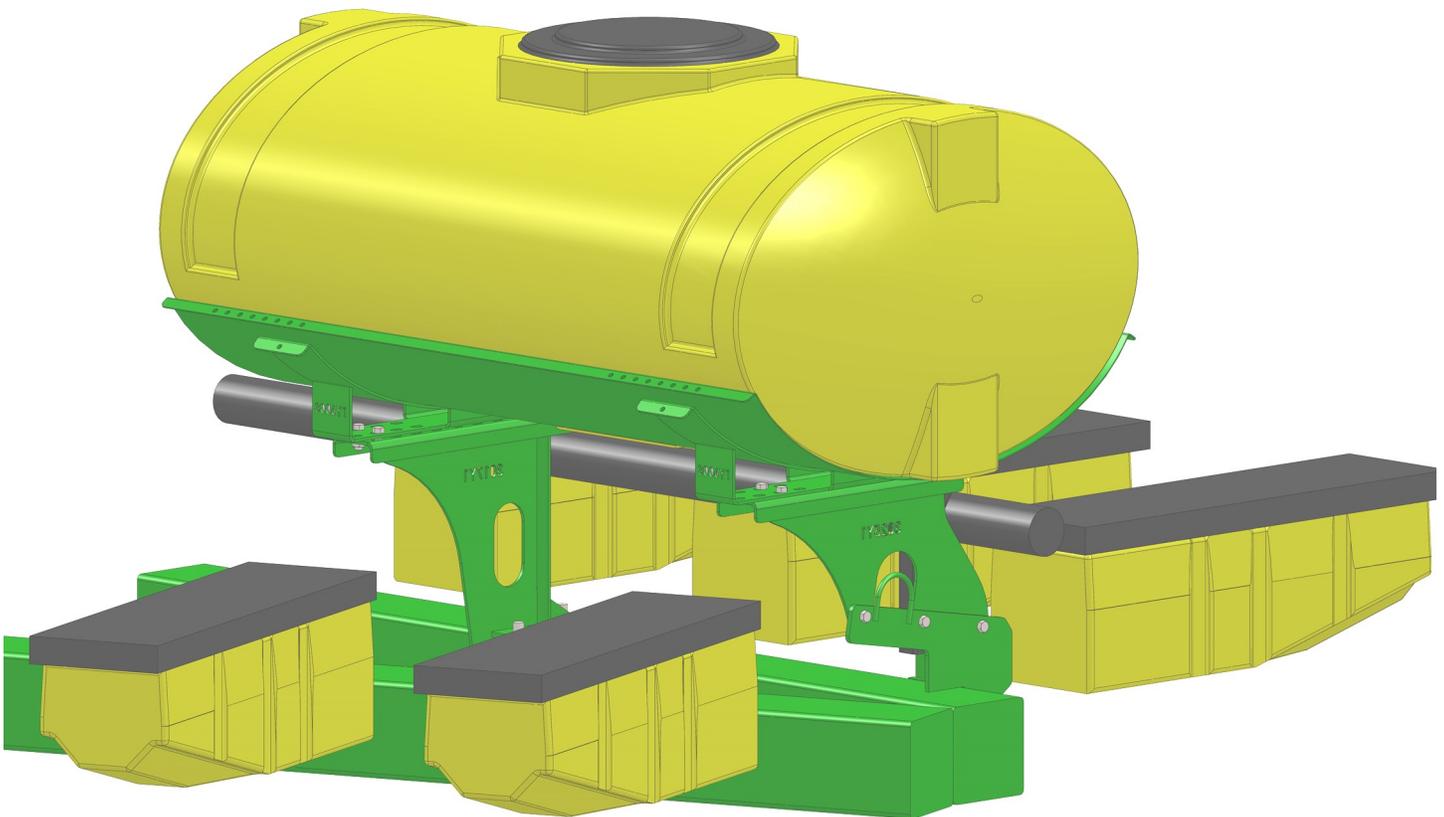




# Parts List

## Kit 530-01-550250

ITEM NO.	PART NUMBER	DESCRIPTION	QTY.
1	727-01-RAV150E	Elliptical Tank - 150 Gallon - Yellow	1
2	420-3001Y1	150 Gallon Elliptical Tank Support Sheet	1
3	420-3009Y1	150 Gallon Elliptical Tank Saddle	2
4	420-3017Y1	Offset Bar Mount for 100-200 Gallon Tank	1
5	420-3025Y1	JD 1760 Outer Tank Mounting Bracket	1
6	380-1060	3/4" x 7" x 8-1/2" Square Bend U-Bolt	2
7	300-080108-5	1/2" x 1-1/2" Hex Head Bolt - G5	11
8	323-08	1/2" Flange Nut	11
9	300-060400-5	3/8" x 4" Hex Head Bolt - G5	4
10	330-06	3/8" Flat Washer	4
11	321-06	3/8" Nylock Nut	4
12	525-2055	2" Tank Strap Kit	2

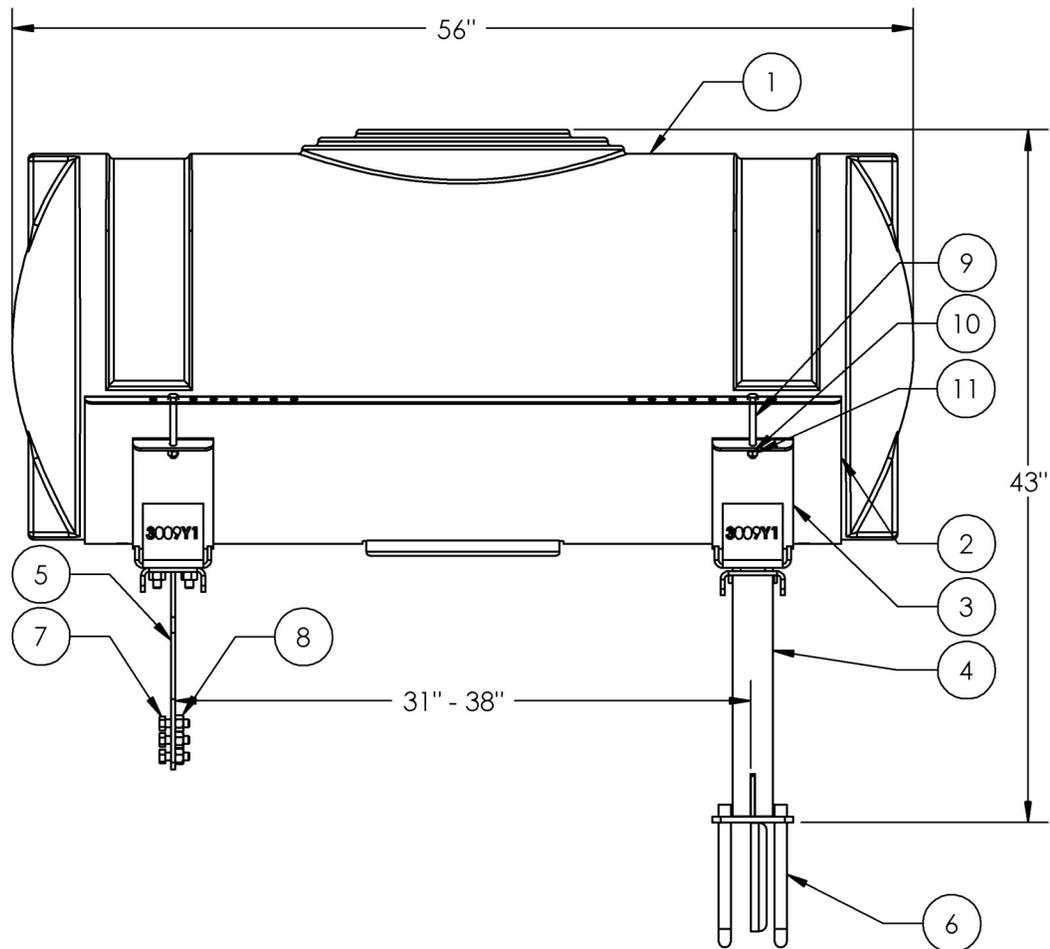




# Parts List

## Kit 530-01-550500

ITEM NO.	PART NUMBER	DESCRIPTION	QTY.
1	727-01-NOR200E	Elliptical Tank - 200 Gallon - Yellow	1
2	420-3000Y1	200 Gallon Elliptical Tank Support Sheet	1
3	420-3006Y1	200 Gallon Elliptical Tank Saddle	2
4	420-3017Y1	Offset Bar Mount for 100-200 Gallon Tank	1
5	420-3025Y1	JD 1760 Outer Tank Mounting Bracket	1
6	380-1060	3/4" x 7" x 8-1/2" Square Bend U-Bolt	2
7	300-080108-5	1/2" x 1-1/2" Hex Head Bolt - G5	11
8	323-08	1/2" Flange Nut	11
9	300-060400-5	3/8" x 4" Hex Head Bolt - G5	4
10	330-06	3/8" Flat Washer	4
11	321-06	3/8" Nylock Nut	4
12	525-2055	2" Tank Strap Kit	2

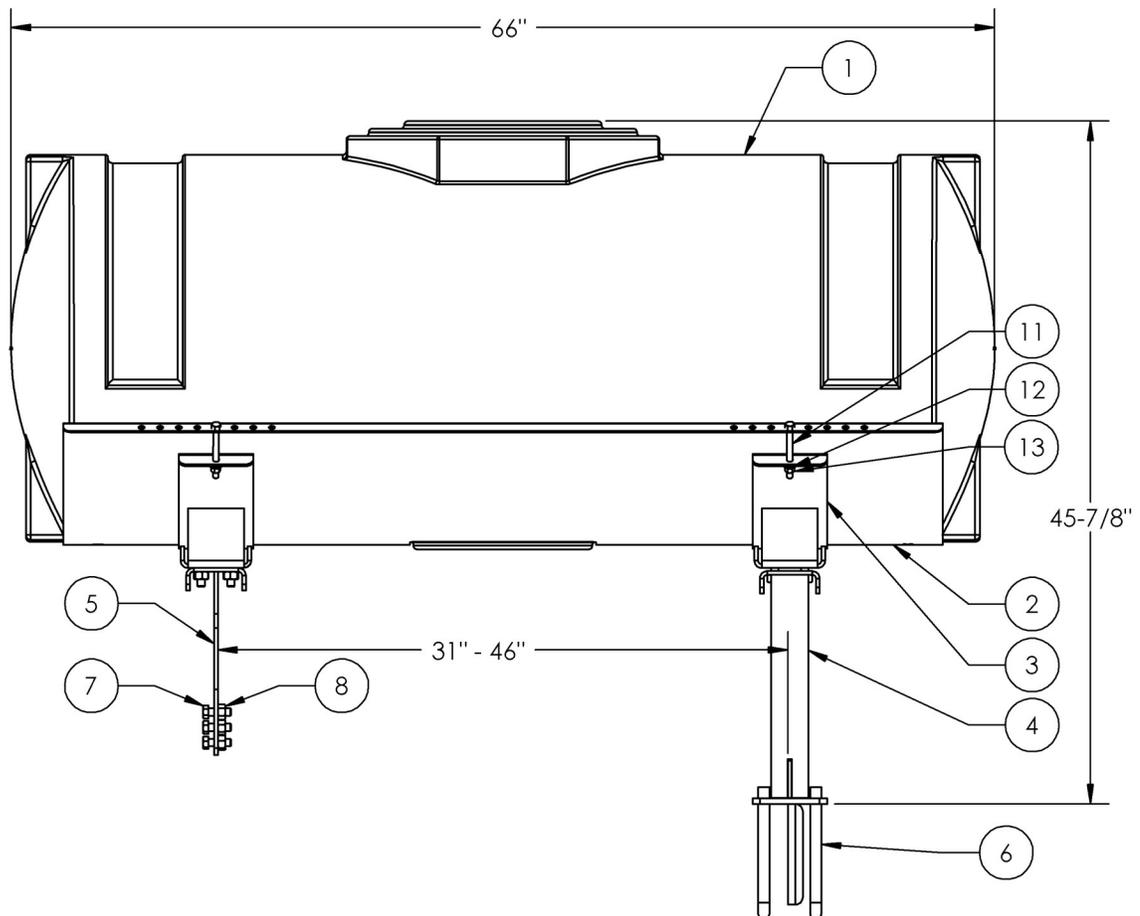




# Step by Step Instructions

1. It may be necessary to remove light bracket by removing two bolts from the black support tube.
2. Use three (3) 1/2" x 1-1/2" hex head bolts to attach outer tank mounting bracket, (Part Number 420-3025Y1) to planter. Wrench tighten.
3. Use two (2) 3/4" x 7" x 8-1/2" square bend u-bolts to loosely attach offset bar mount (Part Number 420-3017Y1) to 7x7 planter frame as shown.

*Note: Offset bar mount bracket should be placed approximately 31"-38" from outer tank bracket.*

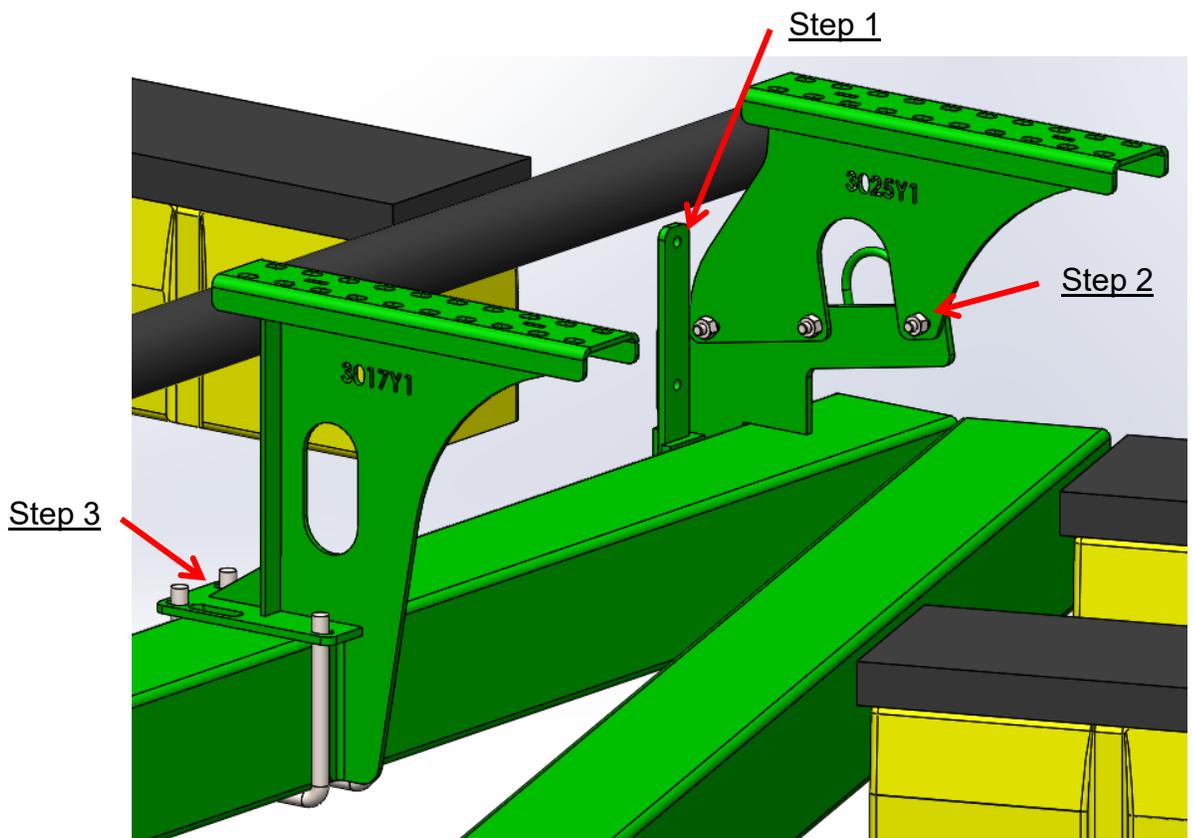




# Step by Step Instructions


4. Attach tank saddles to tank mounting brackets using four (4) 1/2" x 1-1/2" Hex Head Bolts for each tank saddle.

*Note: Part number for tank saddle may vary based on tank size.*

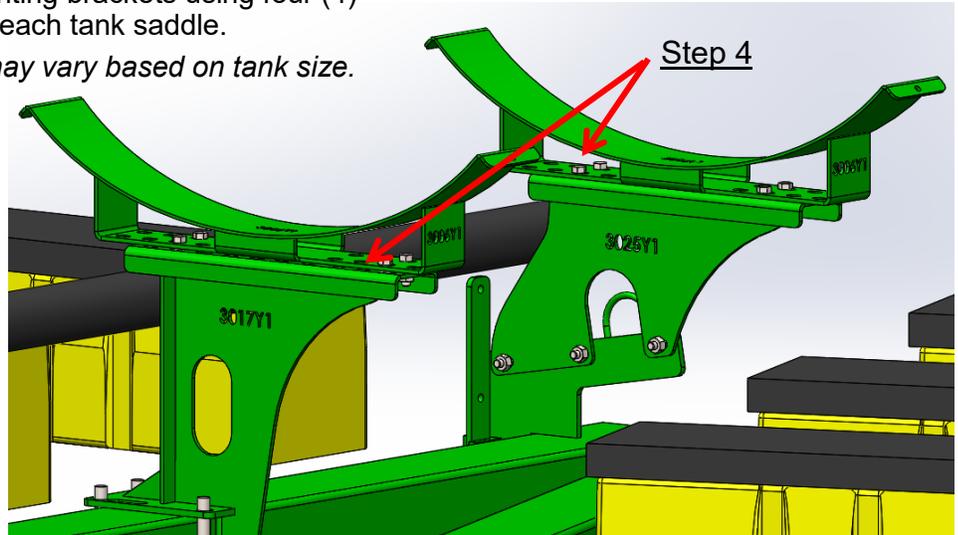

5. Place tank support sheet and tank in saddle. *Note: Part number for tank support sheet may vary based on tank size.*
6. Check for tank clearance and adjust offset bar mount as necessary to line up the holes on the tank saddles and tank support sheet. *Note: The outside hole is to be used for tank straps. Any of the other holes can be used to bolt the tank support sheet to the tank saddle.*

7. Attach tank support sheet to saddles using four (4) 3/8" x 4" hex head bolts, flat washers and nylock nuts.
8. Attach 525-2055 tank strap kits and tighten bolts. Make sure to re-tighten straps after the tank has been filled.

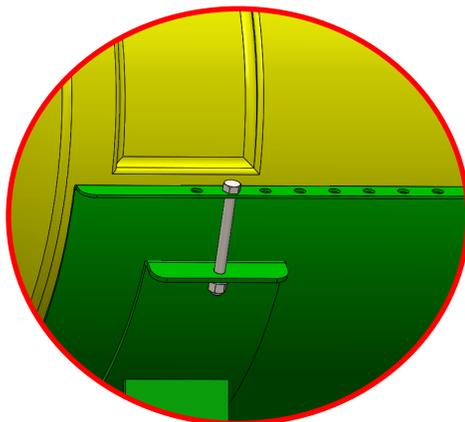

Steps 6-8

